



Combined Hoisting Assembly

'S' Series Chain Block Close Coupled to Push or Geared Girder Trolley Capacities: 1 tonne to 5 tonnes



FEATURES

- Hoist and trolley integrated offers minimum headroom and theft protection
- Robust all steel construction
- Minimum effort to raise load
- Super strength alloy steel chain
- Stainless steel name plates
- Durable baked enamel paint protection
- Weather protected Weston brake
- Cast steel safety latches
- Spare parts always available
- Overload protection offered as optional extra

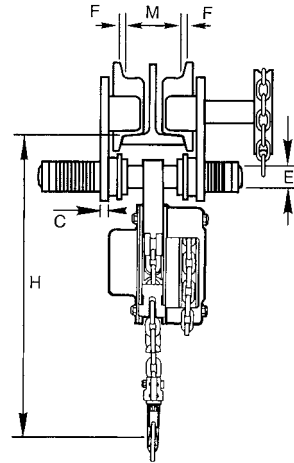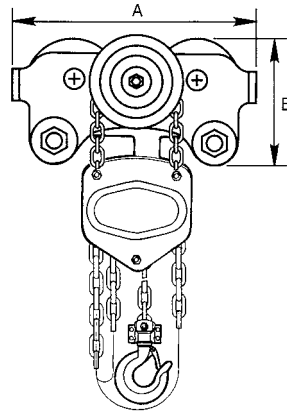

Product Code		OCHRG1/0	OCHRG2/0	OCHRG3/0	OCHRG5/0
Rated Capacity	tonnes	1	2	3	5
Test load	kN	15	30	45	75
Min. radius	m	1	1.2	1.4	1.6
Pulling force to lift full load	N	40	70	65	100
Standard Lift	m	3	3	3	3
Dimensions mm	A	277	302	363	436
	B	170	194	230	260
	C	10	12	14	18
	D	283	295	304	330
	E	M22	M27	M30	M42
	F	≈3	≈3	≈3	≈3
Beam width	mm	58-180	58-180	74-180	98-180
Min. headroom H	mm	375	438	593	741

COMPLIES WITH AS/NZS1418.2

Meets or exceeds all relevant world standards