

ROUND SLING

SPECIFICATION FOR 3 TONNE - YELLOW

**AS
4497.1**



Round Sling - Polyester


Every Austlift sling is fabricated using 100% high tenacity polyester yarn and wound in a continuous hank to form an endless sling. Durable and specially woven, 100% polyester non-load bearing tubular sleeve to give maximum wear protection to the yarn hank. Conforms to Australian Standard AS 4497.1. Black colour available upon request.

Application







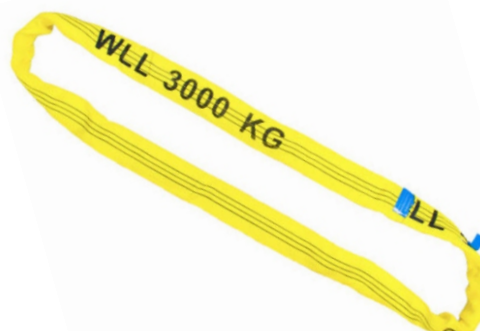

- Building construction sites
- Ship building yards
- Factory production workshops
- Mine production sites
- Engineering workshops

Features

- Each sling is proof tested 2 x WLL.
- Individually serial numbered.
- Supplied with individual test certificate.
- Break Load Limit is 7 x the load indicated
- Label is under protective sleeve, to prevent damage to it.



WORKING LOAD LIMITS CHART (KG) - (WLLs)

ROUND SLING								
	VERTICAL	CHOKE	BASKET	60°	90°	120°	SINGLE WRAP Max 45°	DOUBLE WRAP Max 45°
YELLOW	3000	2400	6000	5100	4200	3000	4,140	4,140