

G100 SWIVEL BALL BEARING SELF LOCKING HOOK

SPECIFICATION FOR 6MM TO 22MM

AS/NZS
3776

Certified

Safety Factor
4-1

G100
Alloy Steel

G100 Swivel Ball Bearing Self Locking Hook


Austlift Grade 100 Swivel Self-locking Hook has a ball bearing swivel to allow the hook to swivel thus reducing the twist of a sling.

- Marked with chain size, designation, grade, manufacture quality mark and Austlift branded.
- 25% higher work load limit than G80.
- Batch tested, test certificates available upon request.
- Spare trigger kits are available.
- Fatigue tested > 20,000 times.



Application

- Building construction sites
- Ship building yards
- Crane production sites
- Mine production sites
- Engineering Workshops

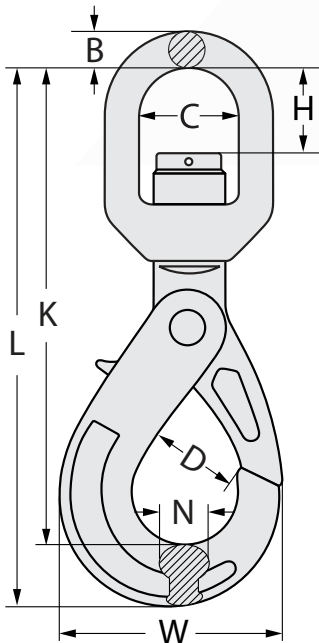

SIZE (mm)	CODE	WLL (T)	Wt. (kg)	DIMENSIONS (mm)							
				B	C	D	E	H	K	L	W
6	173706	1.4	0.67	13	37	27	30	32	163	196.5	70
8	173708	2.5	1.21	15	41	35.5	40	39	202	243	90
10	173710	4	2.2	17.5	48	45	48	48	244	289	108
13	173713	6.7	4.4	19	55	52.5	63	57	292	351	138
16	173716	10	7.48	26	62	62	75	62	346	422	170
20	173720	16	13.75	28.5	76	76	80	72	396	487	191
22	173722	19	18.81	33	97	79	95	97	465	563	208

AUSTLIFT Lifting your business to a higher level.

NSW Head Office

43 Frank Street
 Wetherill Park, NSW 2164
 02 9757 2277

WA Office

42 Mulgal Road
 Malaga, WA 6090
 08 9248 6674

QLD Office

7 Durbell Street
 Acacia Ridge, QLD 4110
 07 3272 0777

VIC Office

475 Dohertys Road
 Truganina, VIC 3029
 03 9314 5525