


## Load Ring VLBS-U-1,5t with spring

Artikel-Nr: 7993035




Universal Lifting point for welding with a diverse operating range in engineering and plant manufacturing.

- Suspension ring with optimised function form for a better support at side loading and protection of the clamping spring.
- Suspension ring pivots 180°.
- 100 % WLL at 90° in the load ring plane possible.
- Clamping spring works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lashing mean possible.
- Distance knobs at the weld-on block to achieve the necessary distance for the root weld.
- Clear marking of the minimum WLL for all loading directions.
- Simple and process safe positioning for the welding of pre-assembled components consisting of suspension ring and weld-on blocks. Weld: HV 5 + a 3
- The weld-on-block is made (forged) out of a good weldable steel.
- Tested and certified by DGUV, Testing specifications: GS-OA-15-04:2012-05, Certificate-No.: OA 1451021
- Significant product characteristics of the VLBS are subject to property right claims.
- Confirmation of the deep temperature ability to -40°C by the notch bar impact test is on request possible (before order is placed).

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## Load Ring VLBS-U-1,5t with spring


Artikel-Nr: 7993035

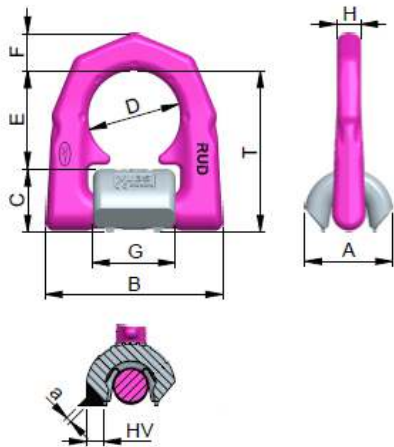

<b>weight</b>	0.35 kg	0.77 lbs
<b>Nominal WLL</b>	1500 kg	3300 lbs
<b>T</b>	65 mm	2-9/16"
<b>A</b>	33 mm	1-5/16"
<b>B</b>	66 mm	2-5/8"
<b>C</b>	25 mm	63/64"
<b>D</b>	38 mm	1-1/2"
<b>E</b>	40 mm	1-9/16"
<b>F</b>	14 mm	9/16"
<b>G</b>	33 mm	1-5/16"
<b>H</b>	14 mm	9/16"

## Load Ring VLBS-U-2,5t with spring

Artikel-Nr: 7994830




Universal Lifting point for welding with a diverse operating range in engineering and plant manufacturing.

- Suspension ring with optimised function form for a better support at side loading and protection of the clamping spring.
- Suspension ring pivots 180°.
- 100 % WLL at 90° in the load ring plane possible.
- Clamping spring works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lashing mean possible.
- Distance knobs at the weld-on block to achieve the necessary distance for the root weld.
- Clear marking of the minimum WLL for all loading directions.
- Simple and process safe positioning for the welding of pre-assembled components consisting of suspension ring and weld-on blocks. Weld: HV 7 + a 3
- The weld-on-block is made (forged) out of a good weldable steel.
- Tested and certified by DGUV, Testing specifications: GS-OA-15-04:2012-05, Certificate-No.: OA 1451021
- Significant product characteristics of the VLBS are subject to property right claims.
- Confirmation of the deep temperature ability to -40°C by the notch bar impact test is on request possible (before order is placed).

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## Load Ring VLBS-U-2,5t with spring


Artikel-Nr: 7994830

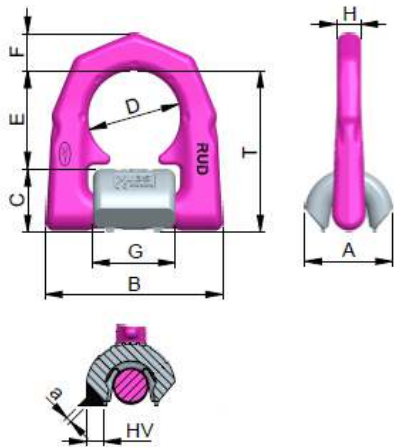

<b>weight</b>	0.53 kg	1.17 lbs
<b>Nominal WLL</b>	2500 kg	5500 lbs
<b>T</b>	75 mm	2-15/16"
<b>A</b>	38 mm	1-1/2"
<b>B</b>	77 mm	3"-1/32"
<b>C</b>	28 mm	1-1/8"
<b>D</b>	45 mm	1-25/32"
<b>E</b>	47 mm	1-7/8"
<b>F</b>	16 mm	5/8"
<b>G</b>	40 mm	1-9/16"
<b>H</b>	16 mm	5/8"

## Load Ring VLBS-U-4t with spring

Artikel-Nr: 7993036




Universal Lifting point for welding with a diverse operating range in engineering and plant manufacturing.

- Suspension ring with optimised function form for a better support at side loading and protection of the clamping spring.
- Suspension ring pivots 180°.
- 100 % WLL at 90° in the load ring plane possible.
- Clamping spring works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lashing mean possible.
- Distance knobs at the weld-on block to achieve the necessary distance for the root weld.
- Clear marking of the minimum WLL for all loading directions.
- Simple and process safe positioning for the welding of pre-assembled components consisting of suspension ring and weld-on blocks. Weld: HV 8 + a 3
- The weld-on-block is made (forged) out of a good weldable steel.
- Tested and certified by DGUV, Testing specifications: GS-OA-15-04:2012-05, Certificate-No.: OA 1451021
- Significant product characteristics of the VLBS are subject to property right claims.
- Confirmation of the deep temperature ability to -40°C by the notch bar impact test is on request possible (before order is placed).

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## Load Ring VLBS-U-4t with spring


Artikel-Nr: 7993036

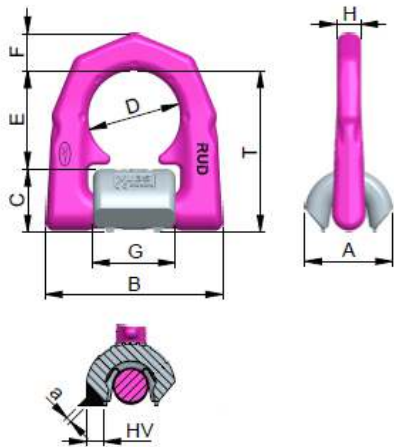

<b>weight</b>	0.72 kg	1.59 lbs
<b>Nominal WLL</b>	4000 kg	8800 lbs
<b>T</b>	83 mm	3-1/4"
<b>A</b>	42 mm	1-21/32"
<b>B</b>	87 mm	3-7/16"
<b>C</b>	31 mm	1-7/32"
<b>D</b>	51 mm	2"
<b>E</b>	52 mm	2-1/16"
<b>F</b>	18 mm	23/32"
<b>G</b>	46 mm	1-13/16"
<b>H</b>	16 mm	5/8"

## Load Ring VLBS-U-6,7t with spring

Artikel-Nr: 7993037




Universal Lifting point for welding with a diverse operating range in engineering and plant manufacturing.

- Suspension ring with optimised function form for a better support at side loading and protection of the clamping spring.
- Suspension ring pivots 180°.
- 100 % WLL at 90° in the load ring plane possible.
- Clamping spring works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lashing mean possible.
- Distance knobs at the weld-on block to achieve the necessary distance for the root weld.
- Clear marking of the minimum WLL for all loading directions.
- Simple and process safe positioning for the welding of pre-assembled components consisting of suspension ring and weld-on blocks. Weld: HV 12 + a 4
- The weld-on-block is made (forged) out of a good weldable steel.
- Tested and certified by DGUV, Testing specifications: GS-OA-15-04:2012-05, Certificate-No.: OA 1451021
- Significant product characteristics of the VLBS are subject to property right claims.
- Confirmation of the deep temperature ability to -40°C by the notch bar impact test is on request possible (before order is placed).

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## Load Ring VLBS-U-6,7t with spring

Artikel-Nr: 7993037

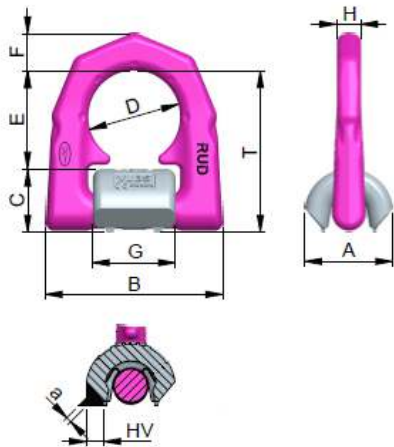


<b>weight</b>	1.89 kg	4.17 lbs
<b>Nominal WLL</b>	6700 kg	15000 lbs
<b>T</b>	117 mm	4-5/8"
<b>A</b>	61 mm	2-13/32"
<b>B</b>	115 mm	4-1/2"
<b>C</b>	44 mm	1-3/4"
<b>D</b>	67 mm	2-5/8"
<b>E</b>	73 mm	2-7/8"
<b>F</b>	24 mm	15/16"
<b>G</b>	60 mm	2-3/8"
<b>H</b>	22,5 mm	7/8"



## Load Ring VLBS-U-10t with spring

Artikel-Nr: 7993040




Universal Lifting point for welding with a diverse operating range in engineering and plant manufacturing.

- Suspension ring with optimised function form for a better support at side loading and protection of the clamping spring.
- Suspension ring pivots 180°.
- 100 % WLL at 90° in the load ring plane possible.
- Clamping spring works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lashing mean possible.
- Distance knobs at the weld-on block to achieve the necessary distance for the root weld.
- Clear marking of the minimum WLL for all loading directions.
- Simple and process safe positioning for the welding of pre-assembled components consisting of suspension ring and weld-on blocks. Weld: HV 16 + a 4
- The weld-on-block is made (forged) out of a good weldable steel.
- Tested and certified by DGUV, Testing specifications: GS-OA-15-04:2012-05, Certificate-No.: OA 1451021
- Significant product characteristics of the VLBS are subject to property right claims.
- Confirmation of the deep temperature ability to -40°C by the notch bar impact test is on request possible (before order is placed).

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## Load Ring VLBS-U-10t with spring

Artikel-Nr: 7993040

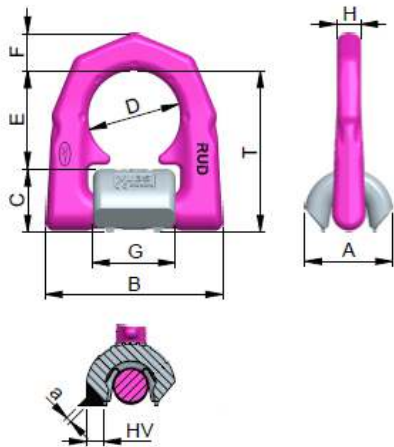

<b>weight</b>	2.76 kg	6.08 lbs
<b>Nominal WLL</b>	10000 kg	22000 lbs
<b>T</b>	126 mm	5"
<b>A</b>	75 mm	2-15/16"
<b>B</b>	129 mm	5-1/16"
<b>C</b>	55 mm	2-5/32"
<b>D</b>	67 mm	2-5/8"
<b>E</b>	71 mm	2-13/16"
<b>F</b>	26,5 mm	1-3/64"
<b>G</b>	60 mm	2-3/8"
<b>H</b>	26,5 mm	1-3/64"