


**cromox Weldable Lifting Points CSAG.
Grade 60**

Type	W.L.L.	Dimensions mm			Weight
	t	a	b	Ød	kg
KW-CSAG05	0.5	33	30	10	0.165
KW-CSAG1	1.0	44	40	13	0.370
KW-CSAG2	2.0	52	55	18	0.955



**cromox Swivel Lifting Eye Screws CDS.
Grade 60**

Type	W.L.L.	Dimensions mm			Thread	Across flats allen key	Weight
	t	a	b	c			kg
CDS05	0.5	44.0	12.5	29.5	M 12 x 22	8	0.200
CDS1	1.0	49.5	14.0	32.5	M 16 x 25	10	0.310




*The above lifting eyes are also available with 50, 100 or 200mm of thread.

New


**cromox Swivel Eye Screws CDS-PSA Grade 60
as Personal Protective Equipment**

Type	For protection of max.	Dimensions mm			Thread	Across flats allen key	Weight
		a	b	c			kg
CDSPSA2	2 Pers.	44.0	12.5	29.5	M 12 x 22	8	0.200
CDSPSA3	3 Pers.	49.5	14.0	32.5	M 16 x 25	10	0.310



*Not stocked. Available on request.

Also available with 50, 100 or 200mm of thread.

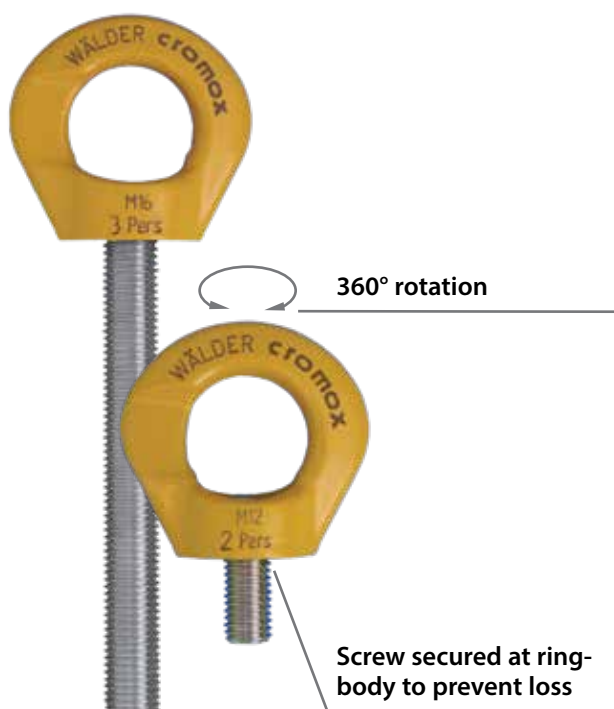

Advantages:

- 360° rotation and adjustable in any load direction
- High fatigue resistance
- Ring-body and screw are 100 % crack detected
- Screw secured at ring-body to prevent loss
- Duplex material 1.4462 (AISI 318LN) ensures superior corrosion resistance
- Approved and certified as Personal Protective Equipment
- Tested acc. DIN EN 795. DIN CEN/TS 16415. DIN EN 50308

Part	Material
Ring Body	AISI 318LN
Screw	AISI 318LN
Locking Nut	AISI 318LN