


cromox Swivel Load Hooks CWHF. Grade 60
for direct connection to chain

This section on Request.

Type	Fitting Chain mm	W.L.L. t	Dimension mm g	Weight kg
CWHF 40	4 x 12/12.1/12.3	0.40	20	0.450
CWHF 50	5 x 15/15.1/15.3	0.63	20	0.450
CWHF 60	6 x 18/16.7	0.95	25	1.100
CWHF 63	6.3 x 19.1	1.00	25	1.100
CWHF 70	7 x 21/22	1.25	25	1.100
CWHF 71	7.1 x 20.5/21.2	1.30	25	1.100
CWHF 80	8.0 x 24/24.2	1.60	40	3.500
CWHF 90	9.0 x 27	2.00	40	3.500
CWHF 95	9.5 x 28.5	2.30	40	3.500
CHWF 100	10.0 x 28/30	2.50	40	3.500

Advantages:

- Duplex body and latch AISI 318 LN ensures superior corrosion resistance
- Easy rotation under full load (ball bearings made of stainless steel AISI 440C)
- Fits chains hoists (hand and motorized) of various manufacturers
- Superior Stainless Steel-grade 60
- Designed for moving heavy loads safely
- Safe and efficient handling through compact, heavy-duty design
- Field-tested hook
- Certificate EN 10204 -3.1 upon request

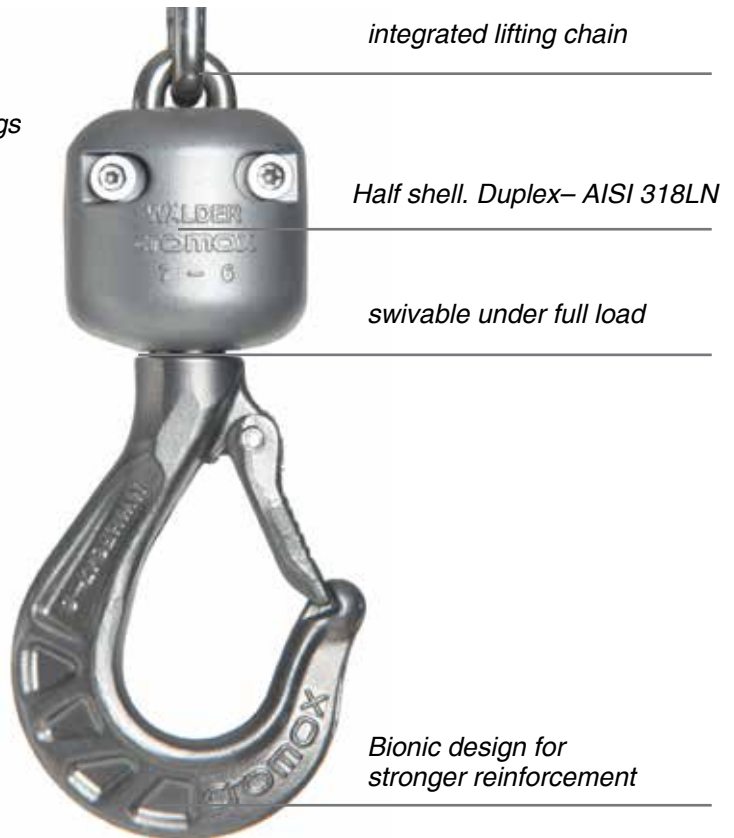

Part	Material
Body	AISI 318LN
Safety Latch	AISI 318LN
Spring	AISI 301
Bolt	AISI 318LN
Half Shell	AISI 318LN
Screws/Nuts	AISI 318LN
Safety Pin	AISI 301
Ball	AISI 440C