20t TELESCOPIC SPREADER BEAM LONG SERIES









DESCRIPTION


I

Tare Weight:	215kg (excluding shackles or associated rigging gear)					
Lifting Lugs (top) suit:	17.0 tonne Grade 'S' safety bow shackle					
Load Lugs (lower) suit:	12.0 tonne Grade 'S' safety bow shackle					
Centre Lug suit:	4.75 tonne Grade 'S' safety bow shackle					

PRODUCT ASSURANCE

Parent Standard:	AS4991		
Proof Load Testing	Yes		
MPI Weld Inspection	Yes		
Manufacturer's Guarantee	1 Year		

Span	WLL (tonnes)			Approx Sling Leg Length (Mtrs)			Approx Headroom (Mtrs)			
(Metres)	60 °	90 °	120 °	CENTRE LIFT	60 °	90 °	120 °	60 °	90 °	120 °
4.0	20.0	14.0	8.0	2.1	4.0	2.8	2.3	3.5	2.0	1.2
4.5	20.0	14.0	8.0	1.9	4.5	3.2	2.6	3.9	2.3	1.3
5.0	20.0	14.0	8.0	1.7	5.0	3.5	2.9	4.3	2.5	1.4
5.5	20.0	14.0	8.0	1.5	5.5	3.9	3.2	4.8	2.8	1.6
6.0	20.0	14.0	8.0	1.3	6.0	4.2	3.5	5.2	3.0	1.7

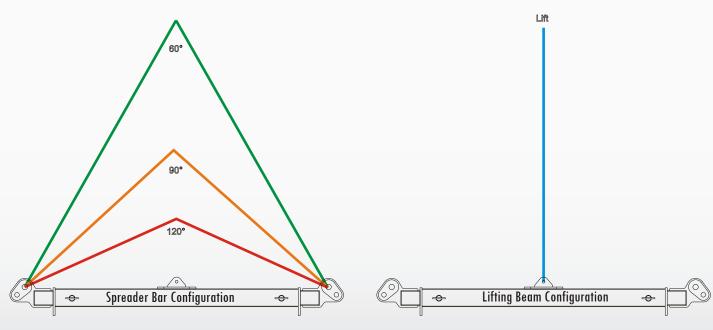



WE PROVIDE SUPERIOR QUALITY LIFTING PRODUCTS AUSTRALIA WIDE

All Maxirig products are designed and manufactured in Australia by our highly skilled team of engineers and boilermakers.