


Eye Plate, ready for welding VRBS-4t



- Split force introduction due to multiple point fixing.
- Suspension ring pivots 180°.
- 100% WLL at 90° in the load ring plane possible.
- Patented markings for easy determination for withdraw of service. Patented markings for determination of the load angle.
- Clear marking of the minimum WLL for all loading directions.
- The weld-on-block is made (forged) out of a quality weldable steel.
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Simple and fast welding installation.
- Confirmation of the low temperature ability to -40°C by the notch bar impact test is possible upon request (before order is placed).

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Eye Plate, ready for welding VRBS-4t

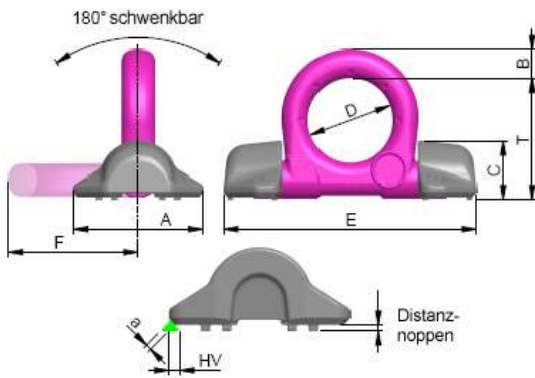

weight	0.77 kg	1.70 lbs
Nominal WLL	4000 kg	8800 lbs
T	65 mm	2-9/16"
A	62 mm	2-7/16"
B	14 mm	9/16"
C	28 mm	1-1/8"
D	48 mm	1-7/8"
E	135 mm	5-5/16"
F	71 mm	2-13/16"


Eye Plate, ready for welding VRBS-6,7t



- Split force introduction due to multiple point fixing.
- Suspension ring pivots 180°.
- 100% WLL at 90° in the load ring plane possible.
- Patented markings for easy determination for withdraw of service. Patented markings for determination of the load angle.
- Clear marking of the minimum WLL for all loading directions.
- The weld-on-block is made (forged) out of a quality weldable steel.
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Simple and fast welding installation.
- Confirmation of the low temperature ability to -40°C by the notch bar impact test is possible upon request (before order is placed).

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Eye Plate, ready for welding VRBS-6,7t

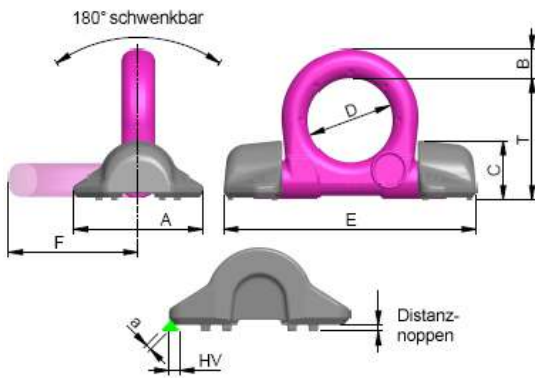

weight	1.64 kg	3.62 lbs
Nominal WLL	6700 kg	15000 lbs
T	84 mm	3-5/16"
A	88 mm	3-15/32"
B	20 mm	3/4"
C	39 mm	1-9/16"
D	60 mm	2-3/8"
E	170 mm	6-11/16"
F	92 mm	3-5/8"


Eye Plate, ready for welding VRBS-10t



- Split force introduction due to multiple point fixing.
- Suspension ring pivots 180°.
- 100% WLL at 90° in the load ring plane possible.
- Patented markings for easy determination for withdraw of service. Patented markings for determination of the load angle.
- Clear marking of the minimum WLL for all loading directions.
- The weld-on-block is made (forged) out of a quality weldable steel.
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Simple and fast welding installation.
- Confirmation of the low temperature ability to -40°C by the notch bar impact test is possible upon request (before order is placed).

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Eye Plate, ready for welding VRBS-10t

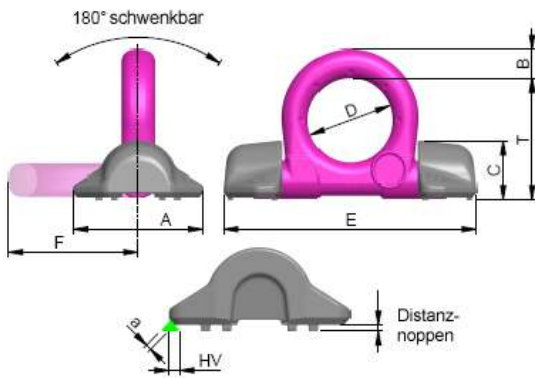

weight	2.62 kg	5.78 lbs
Nominal WLL	10000 kg	22000 lbs
T	95 mm	3-3/4"
A	100 mm	3-15/16"
B	22 mm	7/8"
C	46 mm	1-13/16"
D	65 mm	2-9/16"
E	195 mm	7-11/16"
F	100 mm	3-15/16"


Eye Plate, ready for welding VRBS-16t



- Split force introduction due to multiple point fixing.
- Suspension ring pivots 180°.
- 100% WLL at 90° in the load ring plane possible.
- Patented markings for easy determination for withdraw of service. Patented markings for determination of the load angle.
- Clear marking of the minimum WLL for all loading directions.
- The weld-on-block is made (forged) out of a quality weldable steel.
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Simple and fast welding installation.
- Confirmation of the low temperature ability to -40°C by the notch bar impact test is possible upon request (before order is placed).

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Eye Plate, ready for welding VRBS-16t

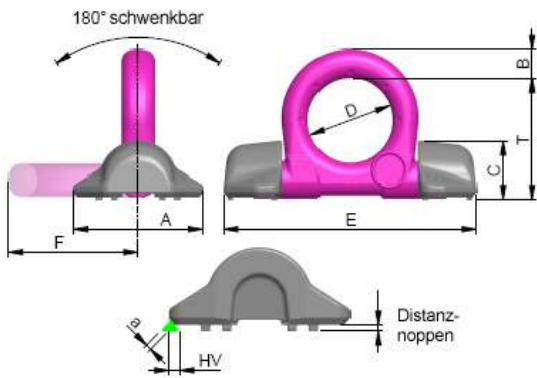

weight	5.53 kg	12.19 lbs
Nominal WLL	16000 kg	35300 lbs
T	127 mm	5"
A	130 mm	5-1/8"
B	30 mm	1-3/16"
C	57 mm	2-1/4"
D	90 mm	3-17/32"
E	263 mm	10-3/8"
F	134 mm	5-9/32"


Eye Plate, ready for welding VRBS-31,5t



- Split force introduction due to multiple point fixing.
- Suspension ring pivots 180°.
- 100% WLL at 90° in the load ring plane possible.
- Patented markings for easy determination for withdraw of service. Patented markings for determination of the load angle.
- Clear marking of the minimum WLL for all loading directions.
- The weld-on-block is made (forged) out of a quality weldable steel.
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Simple and fast welding installation.
- Confirmation of the low temperature ability to -40°C by the notch bar impact test is possible upon request (before order is placed).

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Eye Plate, ready for welding VRBS-31,5t

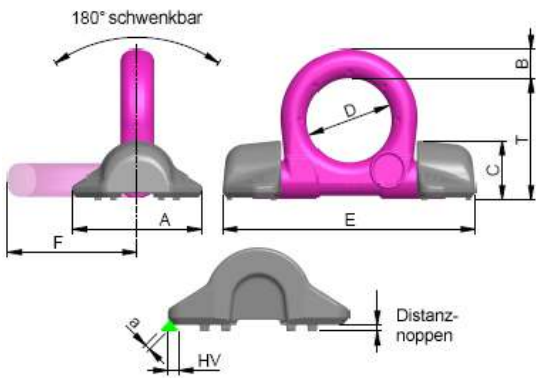

weight	15.60 kg	34.39 lbs
Nominal WLL	31500 kg	69300 lbs
T	178 mm	7"
A	160 mm	6-13/32"
B	42 mm	1-21/32"
C	78 mm	3-1/16"
D	130 mm	5-1/8"
E	373 mm	14-11/16"
F	195 mm	7-11/16"