


0.5t to 10.0t Capacity

Strong and reliable, these machine threaded single flange trolley are perfect for smooth operation on R.S.J. and universal beams and have been designed for longevity - even in the harshest environments.

Key Features

- 01 Machine thread
- 02 All steel construction
- 03 Available in cast iron or fully forged
- 04 Capacities from 500kg to 10 tonne, rated over four wheels
- 05 Complete with a ball bearing, axle, nut, dust cover and circlip

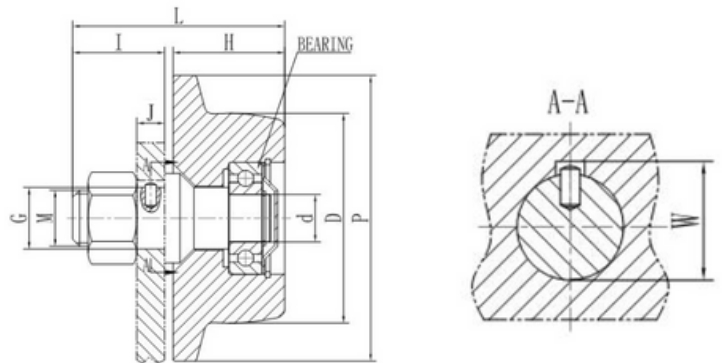

Complies with AS/NZS1418

PRODUCT CODE	W.L.L.	WHEEL Ø	BEARING	PIN SIZE	G Ø	M	d Ø	P Ø	W	I	L	H	J
TWOZ005	0.5t	58mm	203mm	Ø4mm x 8mm	22mm	M20	17mm	82mm	23.6mm	31mm	72mm	38mm	8mm
TWOZ010	1.0t	75mm	203mm	Ø4mm x 8mm	22mm	M20	17mm	102mm	23.6mm	33mm	76mm	40mm	10mm
TWOZ020	2.0t	90mm	204mm	Ø4mm x 8mm	26mm	M24	20mm	120mm	27.6mm	39mm	87mm	45mm	12mm
TWOZ030	3.0t	110mm	305mm	Ø5mm x 10mm	32mm	M30	25mm	141mm	33.6mm	45mm	98mm	50mm	14mm
TWOZ050	5.0t	120mm	2 x 206mm	Ø5mm x 10xx	38mm	M36	30mm	156mm	39.6mm	56mm	113mm	54mm	20mm
TWOZ100	10.0t	150mm	2 x 210mm	Ø8mm x 12mm	57mm	M48	50mm	189mm	58.6mm	77mm	143mm	63mm	25mm